
DEFLECTION SHEAVES AND LOOSE SHEAVES




S.W.L.: 2000 KG
Serial No.
TECNO-LIFT
PULLEY BLOCK
Wire Dia.: 12 mm
S.W.L.: 1000 KG
Serial No.
TECNO-LIFT
PULLEY BLOCK
Wire Dia.: mm

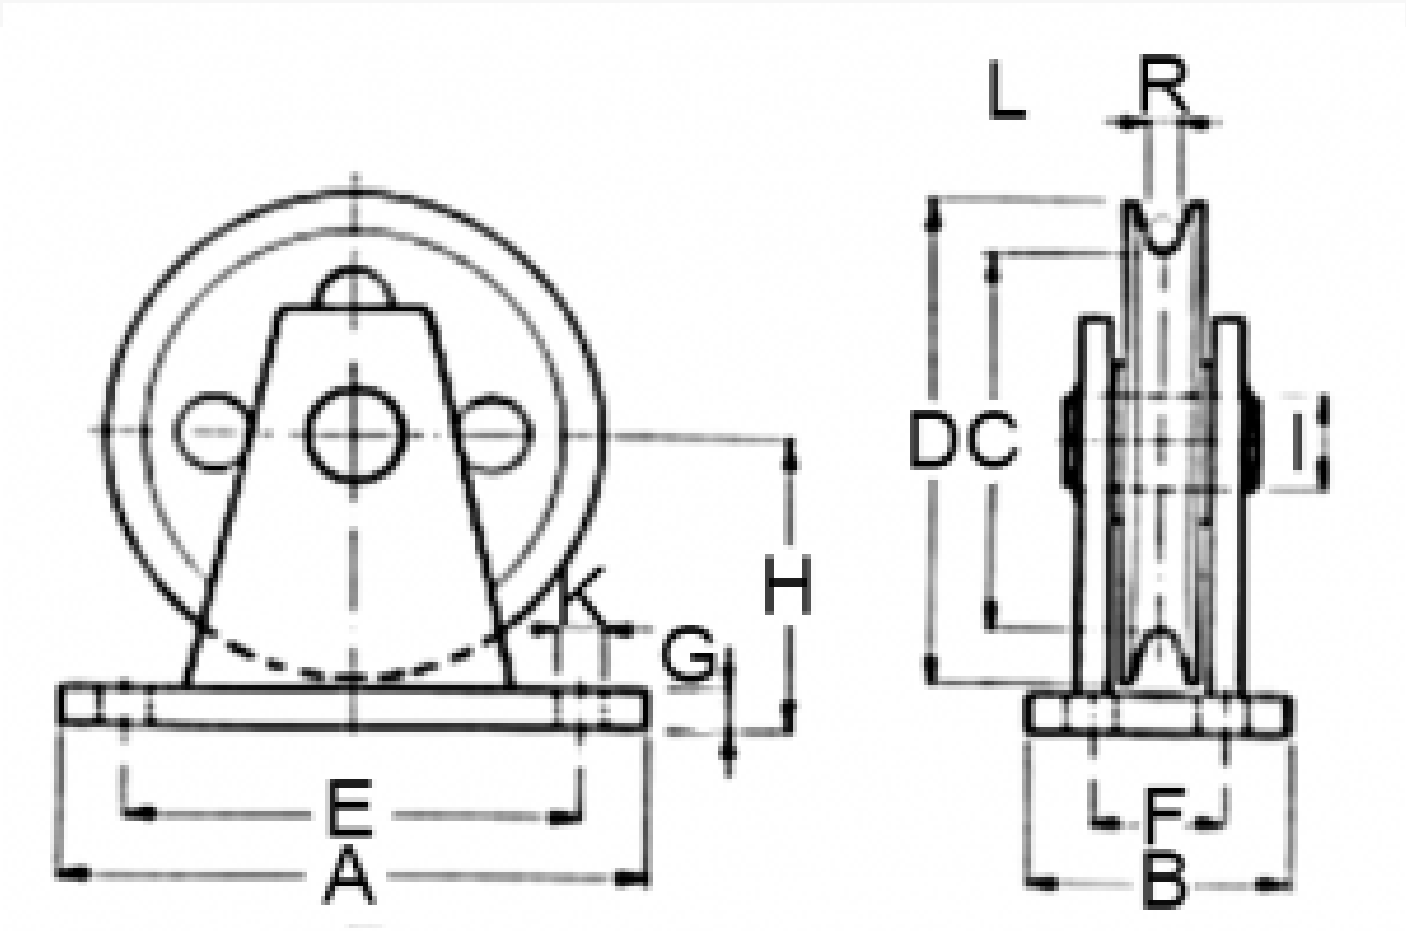

PRODUCT DESCRIPTION

Deflection sheaves and loose sheaves are key components of lifting equipment and crane systems, providing a reliable way to guide and support ropes and wire ropes in various lifting applications. Tuotetekno Oy's range includes quality deflection sheaves and loose sheaves designed to withstand demanding industrial environments.

Deflection sheaves:

- **Material and bearings:** Cast sheaves with plain bearings as standard. Ball-bearing and machined versions are also available to special order.
- **Surface treatment:** Electro-galvanising improves corrosion resistance and extends the product's service life.
- **Bracket:** Steel-frame bracket as standard, ensuring a sturdy mounting and easy installation.

- **Customisation:** We also manufacture multi-sheave and stainless steel models, as well as loose sheaves, to the customer's needs.

Technical data:

Type	WLL (kg)	A (mm)	B (mm)	C Ø (mm)	D Ø (mm)	E (mm)	F (mm)	G (mm)	H Ø (mm)	I Ø (mm)	K Ø (mm)	R (mm)	Weight (kg)
TP1-05	500	120	60	78	100	90	30	8	60	20	10	8	1,5
TP1-10	1000	140	60	98	125	110	35	10	77	25	12	10	2,4
TP1-20	2000	180	80	118	150	140	40	12	92	30	14	13	4,5
TP1-30	3000	230	100	160	200	180	50	15	120	35	18	16	8,2
TP1-50	5000	320	120	225	275	260	60	20	165	40	23	19	18

Tuotetekno Oy's deflection sheaves and loose sheaves offer a durable and reliable solution for many kinds of lifting needs.