
RED ROOSTER TCR-125, -250, -500/2



Red Rooster TCR-125, TCR-250 and TCR-500/2 are light and compact pneumatic chain hoists designed especially for industrial and material handling applications. They offer lifting capacities from 125 kg to 500 kg, and their stepless speed control allows precise load control. The

compact design and lightweight aluminium housing make them easy to move and install in confined spaces. The hoists also have a built-in disc brake and an explosion-proof motor, ensuring safe operation in demanding environments.

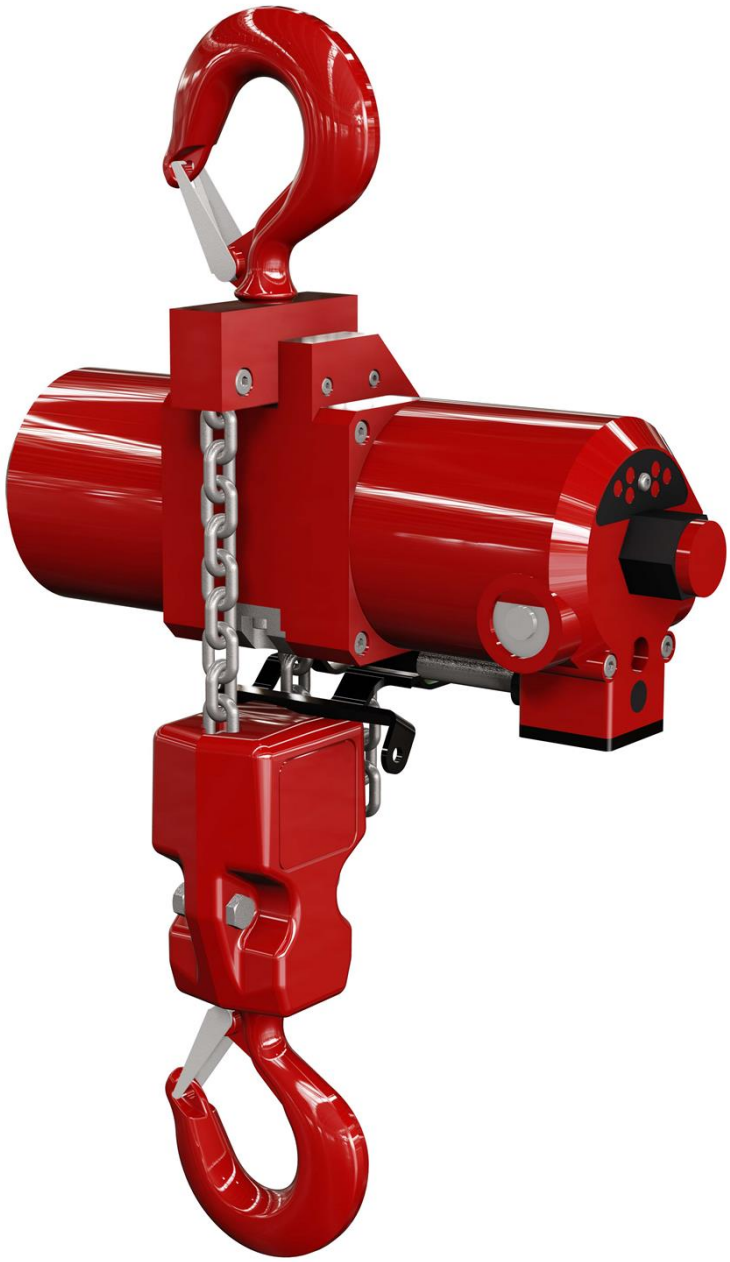

PRODUCT DESCRIPTION

TCR-125 pneumatic chain hoist

TCR-125 is a light and compact pneumatic chain hoist, especially suited to light lifting work in confined spaces.

Key features:

- **Lifting capacity:** 125 kg
- **Lifting speed with load:** 14 m/min
- **Lifting speed without load:** 19 m/min
- **Air consumption:** 11.7 l/s
- **Weight (at 3 m lifting height):** 7 kg
- **Compact and lightweight design:** Easy to handle and install.
- **Stepless speed control:** Allows precise load control.
- **Built-in disc brake system:** Adds operating safety.
- **Explosion-proof motor:** Suitable for use in explosive atmospheres.

TCR-250 pneumatic chain hoist

TCR-250 is a versatile hoist that combines compact size and efficiency, well suited to medium-sized lifting work.

Key features:

- **Lifting capacity:** 250 kg
- **Lifting speed with load:** 9.3 m/min
- **Lifting speed without load:** 19 m/min

- **Air consumption:** 11.7 l/s
- **Weight (at 3 m lifting height):** 7 kg
- **Compact and lightweight design:** Easy to move and install.
- **Stepless speed control:** Precise load positioning.
- **Built-in disc brake:** Ensures safe operation.
- **Explosion-proof motor:** Suitable for use in hazardous areas.

TCR-500/2 pneumatic chain hoist

TCR-500/2 is designed for heavier lifting work, offering reliable performance in demanding industrial and marine applications.

Key features:

- **Lifting capacity:** 500 kg
- **Lifting speed with load:** 4.6 m/min
- **Lifting speed without load:** 9.5 m/min
- **Air consumption:** 13 l/s
- **Weight (at 3 m lifting height):** 8.5 kg
- **Compact and lightweight design:** Easy to handle and install.
- **Stepless speed control:** Allows precise load control.
- **Built-in disc brake:** Adds operating safety.
- **Explosion-proof motor:** Suitable for use in explosive atmospheres.

Interested? Contact us

Message:

Name (required)

Email (required)

Phone (required)

Company

Recaptcha

Lähetä yhteydenottopyyntö