

TEKNOWINCH KOMPAKT SERIES 125-1200 KG

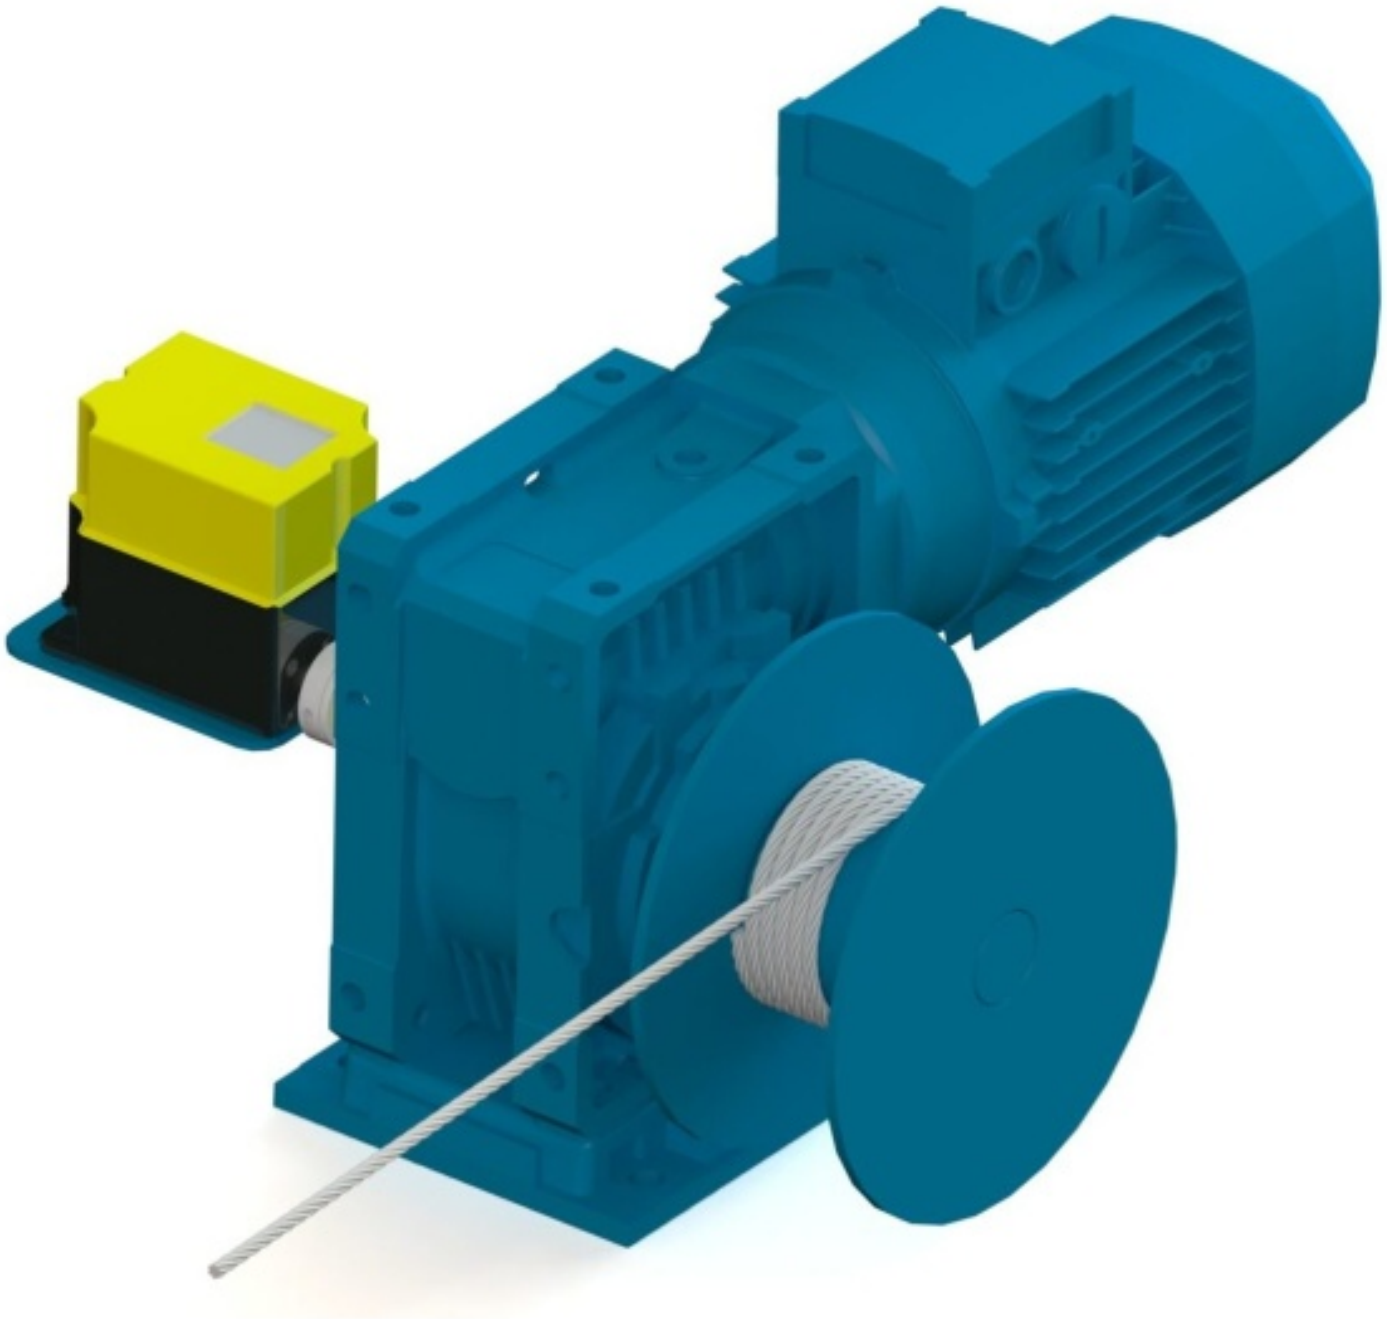

Teknowinch Kompakt is a compact electric winch for sites where space is limited but the pulling or lifting solution must work reliably. It suits machinery, maintenance work and special applications, for example.

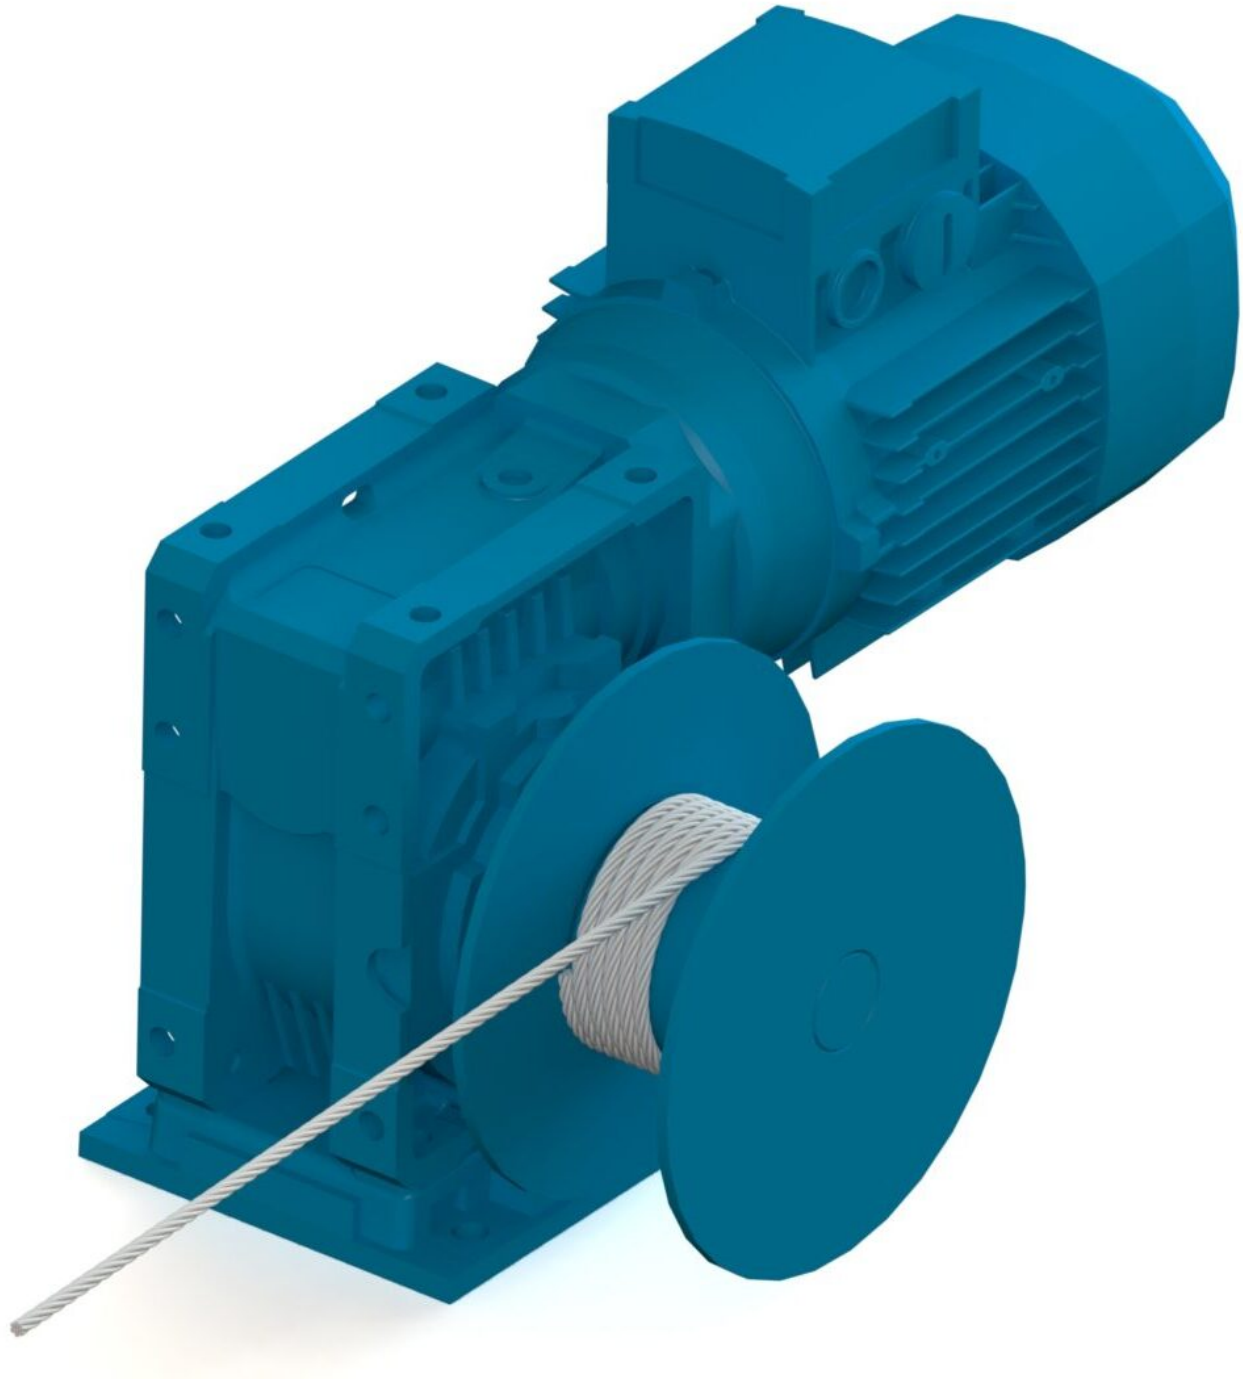

PRODUCT DESCRIPTION

- For horizontal pulling max. 1200 kg
- For lifting max. 1000 kg when equipped with a brake motor and upper/lower limit switch.

- Rope capacity with standard drums max. 50 m. Can also be fitted with Dyneema rope or acid-proof wire rope.
- Lifting / pulling speeds 3 – 15 m/min (single speed), depending on the application.
- With frequency inverter control, 2-speed or stepless.
- Control options: pendant control with main or auxiliary current control, or radio control.

Standard operating voltages 230/400 V/50 Hz, single- and three-phase. Other voltages case by case.
Also available hydraulic or pneumatic.
Protection class IP 55 as standard, also IP 56 certified for marine applications.
Rope drum powder-coated RAL 5010 blue as standard. Other surface treatments on request.
A stainless steel rope drum is also available.

TEKNOWINCH

Winch quotation request, preliminary winch details:

Application
Lifting winch ▼
Load capacity

Rope length

Speed

Drive
Electric ▼

Control method
Radio control ▼
Operating conditions
Indoor use +10..+40 °C ▼
Special conditions (seawater, chemicals, vapours..)

Finish
Painted ▼
Budget enquiry, we only need an indicative price
☐Preliminary budget enquiry

Message:

Name (required)

Email (required)

Phone (required)

Company

Recaptcha

Lähetä yhteydenottopyyntö