
# TEKNOWINCH STANDARD SERIES 125 – 1200 KG, PLANETA PFW SERIES 250 - 3000 KG

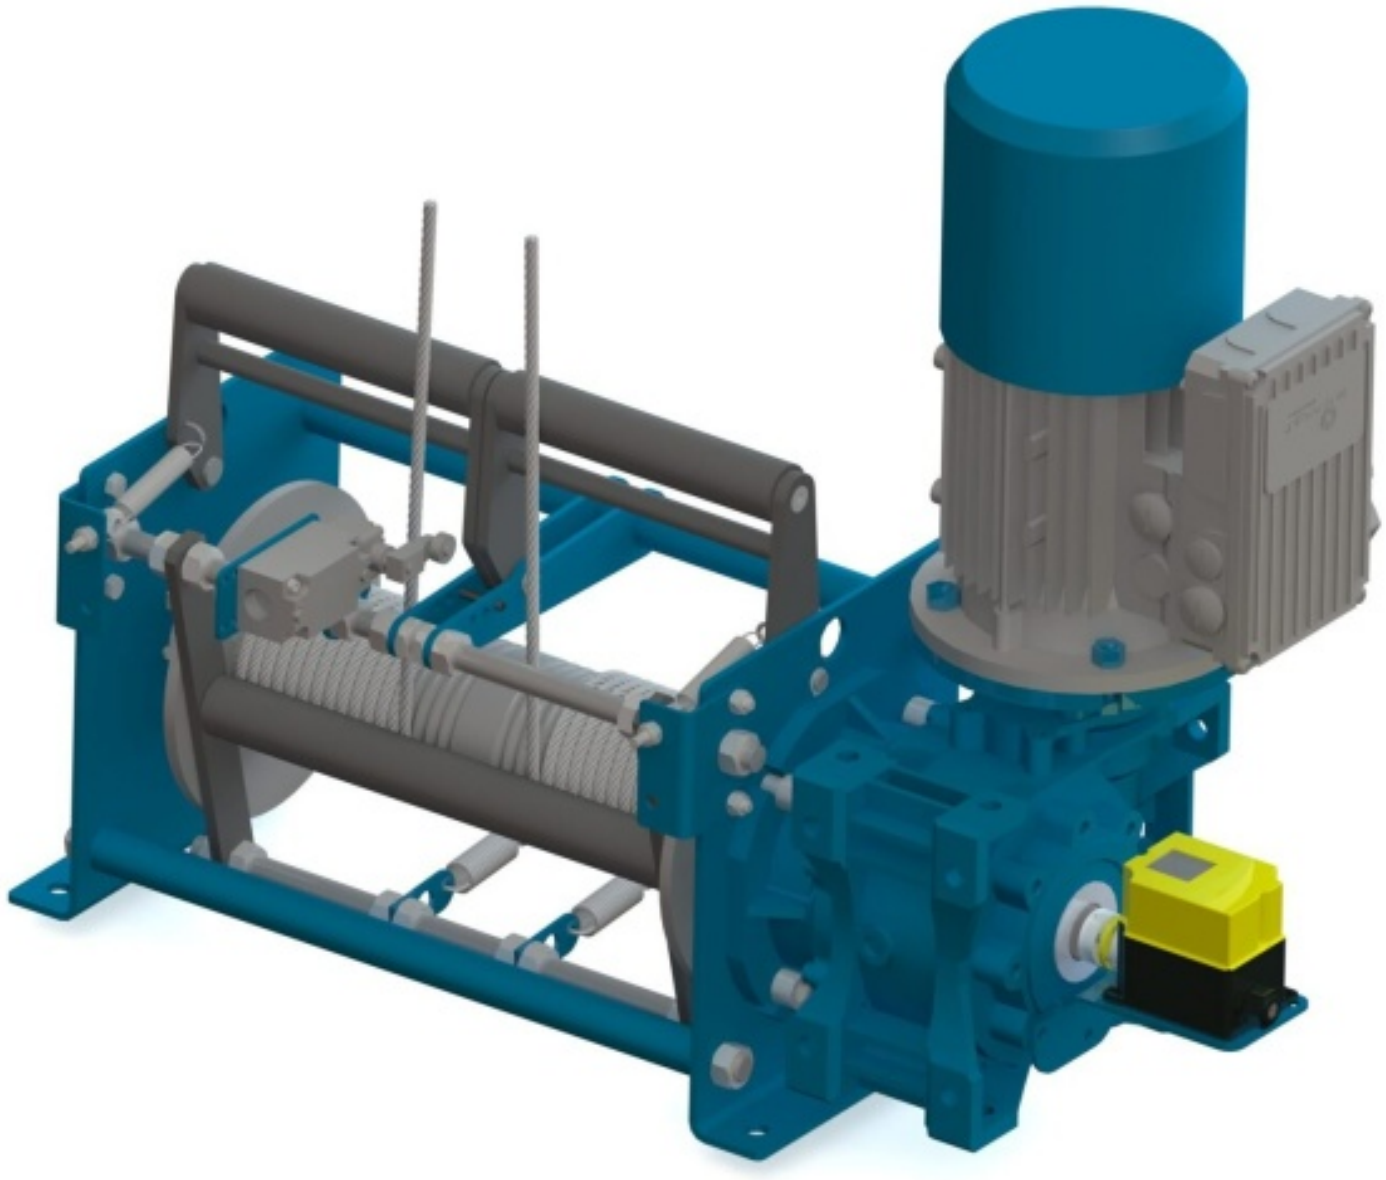

Teknowinch Standard and Planeta PFW winches suit industrial pulling and lifting needs where a reliable wire rope winch with a clear capacity is required. The model is selected according to the

load, duty and installation environment.

## PRODUCT DESCRIPTION

Many options available:

- drum with special dimensions; length and diameter dimensioned as required
- grooved drum
- attachment of several ropes on the drum -> split drum with intermediate flanges
- rope pressure roller
- upper / lower limit switch with 2 or 4 micro switches
- slack rope limit switch
- slip ring installation
- pulse or inductive sensor installation
- rope spooling device -> spools the rope evenly on the drum
- free-spool clutch (horizontal pulling winches only) -> the rope can be pulled off the drum quickly
- brake release lever + hand crank for emergency operation
- weather or mesh guard
- stainless or acid-resistant construction
- ATEX equipment
- Stage technology models -> equipped with double brake to D8 and D8+

For horizontal pulling max. 3500 kg
For lifting max. 3000 kg when equipped with a brake motor and upper/lower limit switch.
Rope capacity case by case. Can also be fitted with Dyneema rope or acid-resistant wire rope.
Lifting / pulling speeds 3 – 15 m/min (single speed), depending on the application.
With frequency inverter control, 2-speed or stepless.
Control options: pendant control with main or auxiliary current control, or radio control.
Standard operating voltages 230/400 V/50 Hz, single- and three-phase. Other voltages case by case.
Also available hydraulic or pneumatic.
Standard protection class IP 55, also IP 56 and IP 66 certified for marine applications.
Rope drum powder-coated RAL 5010 blue as standard. Other surface treatments on request.

## Winch quotation request, preliminary winch details:

Application
Lifting winch ▼
Load capacity

Rope length

Speed

Drive
Electric ▼

Control method
Radio control ▼
Operating conditions
Indoor use +10..+40 °C ▼
Special conditions (seawater, chemicals, vapours..)

Finish
Painted ▼
Budget enquiry, we only need an indicative price
☐Preliminary budget enquiry

Message:

Name (required)

Email (required)

Phone (required)

Company

Recaptcha

Lähetä yhteydenottopyyntö