
TOP-BRACED PILLAR JIB CRANES

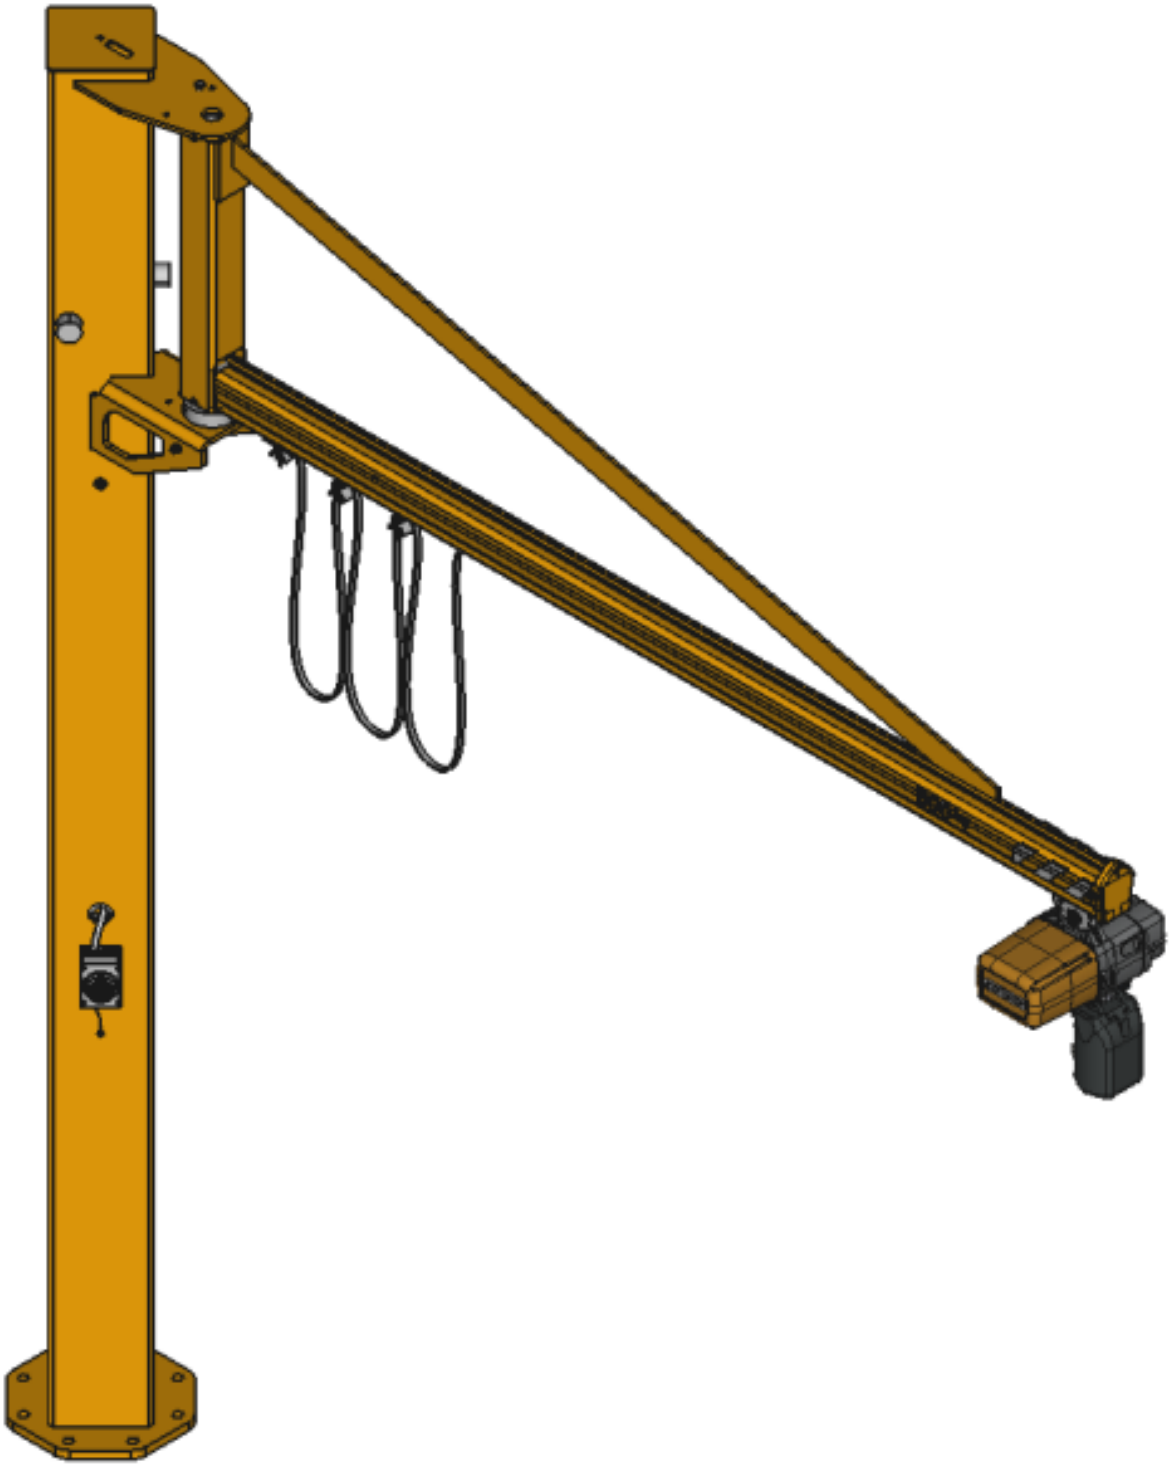

PRODUCT DESCRIPTION

Top-braced pillar jib cranes (PKY)

Lifting capacity 125–1500 kg, outreach 2–8 m

Applications

Top-braced pillar jib cranes suit handling heavy loads, especially in industrial and production facilities that need a wide working area and high lifting capacity.

Technical features (examples of standard dimensions)

Model	Outreach (m)	Load (kg)	Height (mm)	Total weight (kg)
PKY 125	2–8 m	125	2007–5507	153–343
PKY 250	2–8 m	250	2007–5507	153–600
PKY 500	2–8 m	500	2007–5809	265–1184
PKY 1000	2–6 m	1000	3304–5809	417–1149
PKY 1500	2–5 m	1500	3304–6009	552–947

Detailed dimensions and variations available on request.

Mounting and structure

- Base plate: 500x500 mm as standard, up to 700x700 mm for heavy models
- Bolt frames and anchor kits:
  - PK1–PK4 bolt frames (different plate thicknesses)
  - Anchor kits M16–M27
- Structure: sturdy steel, powder coated

Available accessories

- Slewing angle limiters
- Motorised slewing
- Hoists and lifting accessories

Interested? Contact us

Message:

Name (required)

Email (required)

Phone (required)

Company

Recaptcha

Lähetä yhteydenottopyyntö