
TOP-BRACED WALL JIB CRANES

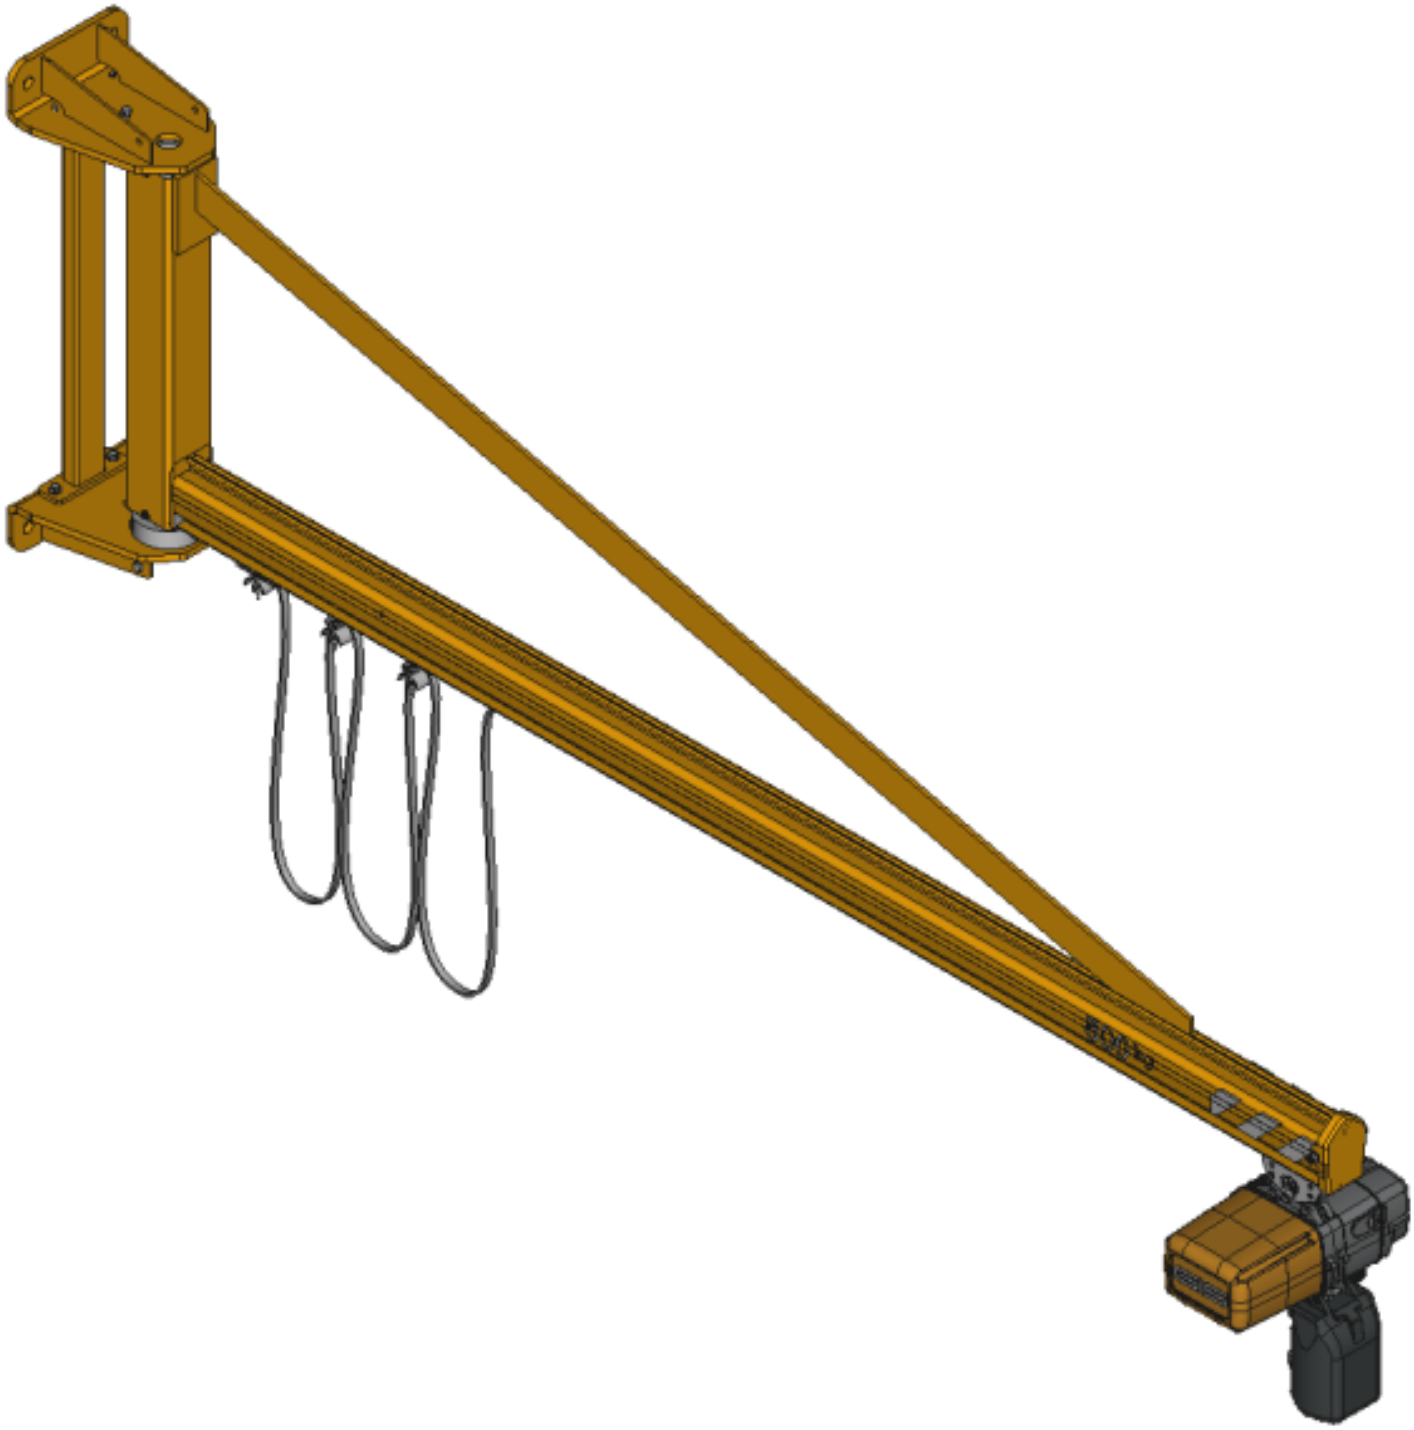

PRODUCT DESCRIPTION

Top-braced wall jib cranes (SKY)

Lifting capacity 125–1500 kg, outreach 2–8 m

Applications

Top-braced wall jib cranes suit handling heavy loads, especially in industrial and production facilities that need a wide working area and high lifting capacity.

Technical features (examples of standard dimensions)

Model	Outreach (m)	Load (kg)
SKY 125	2–8 m	125
SKY 250	2–8 m	250
SKY 500	2–8 m	500
SKY 1000	2–6 m	1000
SKY 1500	2–5 m	1500

Detailed dimensions and variations available on request.

Mounting and structure

- Base plate: 500x500 mm as standard, up to 700x700 mm for heavy models
- Structure: sturdy steel, powder coated

Available accessories

- Slewing angle limiters
- Motorised slewing
- Hoists and lifting accessories

Interested? Contact us

Message:

Name (required)

Email (required)

Phone (required)

Company

Recaptcha

Lähetä yhteydenottopyyntö